


Y22691



Y22691-T

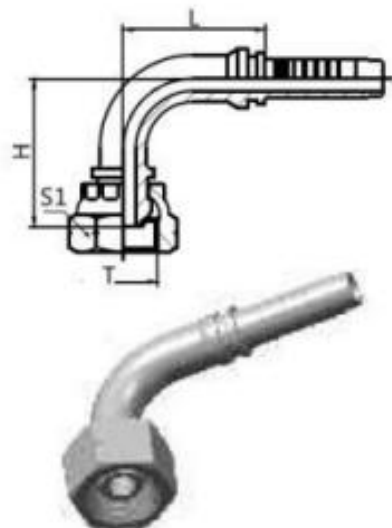

90°英管内螺纹60°外锥面
BSP Female 60° Cone ISO 12151-6

代号 PART NO.	螺纹T THREAD T	软管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径DN	标号 DASH	L	H		S1
Y22691-02-04	G1/8 " X28	6	04	32	27		14
Y22691-04-04	G1/4 " X19	6	04	32	28		19
Y22691-04-05	G1/4 " X19	8	05	32.5	31.5		19
Y22691-04-06	G1/4 " X19	10	06	36.5	34		19
Y22691-06-04T	G3/8 " X19	6	04	32	31		22
Y22691-06-05T	G3/8 " X19	8	05	32.5	34		22
Y22691-06-06	G3/8 " X19	10	06	36.5	34		22
Y22691-06-08	G3/8 " X19	13	08	44.5	42		22
Y22691-08-06T	G1/2 " X14	10	06	36.5	35		27
Y22691-08-08	G1/2 " X14	13	08	44.5	41		27
Y22691-10-08T	G5/8 " X14	13	08	44.5	45		30
Y22691-10-10	G5/8 " X14	16	10	55	51		30
Y22691-12-10T	G3/4 " X14	16	10	55	56		32
Y22691-12-12	G3/4 " X14	19	12	62	58		32
Y22691-16-12T	G1 " X11	19	12	62	62		41
Y22691-16-16	G1 " X11	25	16	74	70		41
Y22691-20-16T	G1.1/4 " X11	25	16	74	76		50
Y22691-20-20	G1.1/4 " X11	32	20	91.5	85		50
Y22691-24-20T	G1.1/2 " X11	32	20	91.5	92		55
Y22691-24-24	G1.1/2 " X11	38	24	108	100		55
Y22691-32-24T	G2 " X11	38	24	108	110		70
Y22691-32-32	G2 " X11	51	32	133.8	140		70


注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y22692-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y22692-XX-XX.

Y22641

45°英管内螺纹60°外锥面
45° BSP Female 60° Cone ISO 12151-6

代号 PART NO.	螺纹T	软管 HOSE BORE		尺寸 DIMENSIONS			
	THREAD T	公称内径DN	标号 DASH	L	H		S1
Y22641-02-04	G1/8"X28	6	04	38.8	15		14
Y22641-04-04	G1/4"X19	6	04	38.8	15		19
Y22641-04-05	G1/4"X19	8	05	41.7	18		19
Y22641-04-06	G1/4"X19	10	06	45	19		19
Y22641-06-04T	G3/8"X19	6	04	39.8	16		22
Y22641-06-05T	G3/8"X19	8	05	41.7	18		22
Y22641-06-06	G3/8"X19	10	06	44	18		22
Y22641-06-08	G3/8"X19	13	08	54.3	23		22
Y22641-08-06T	G1/2"X14	10	06	44	18		27
Y22641-08-08	G1/2"X14	13	08	51.3	20		27
Y22641-10-08T	G5/8"X14	13	08	54.3	23		30
Y22641-10-10	G5/8"X14	16	10	64.2	25		30
Y22641-12-10T	G3/4"X14	16	10	67.2	28		32
Y22641-12-12	G3/4"X14	19	12	71.7	29		32
Y22641-16-12T	G1"X11	19	12	74.7	32		41
Y22641-16-16	G1"X11	25	16	84.4	35		41
Y22641-20-16T	G1.1/4"X11	25	16	88.4	39		50
Y22641-20-20	G1.1/4"X11	32	20	100.8	40		50
Y22641-24-20T	G1.1/2"X11	32	20	114.8	54		55
Y22641-24-24	G1.1/2"X11	38	24	121.1	50		55
Y22641-32-24T	G2"X11	38	24	130.1	59		70
Y22641-32-32	G2"X11	51	32	155	70		70


注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y22642-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y22642-XX-XX.

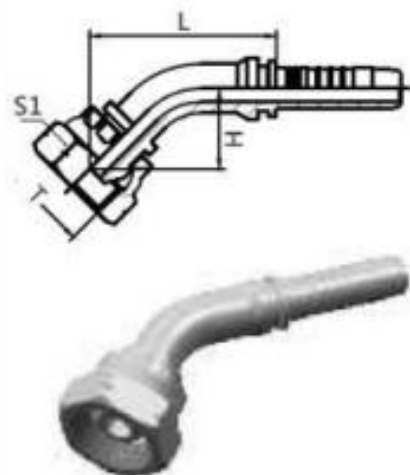


Y22641-T



Y22611

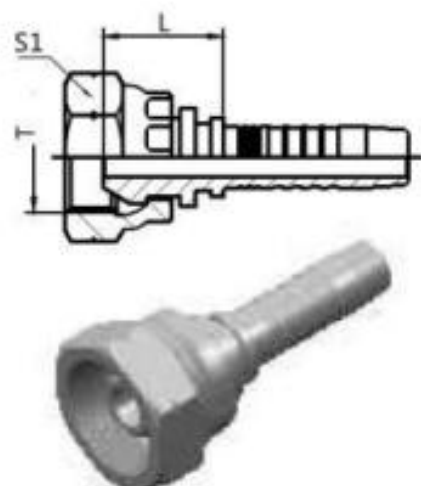

Y22611-T

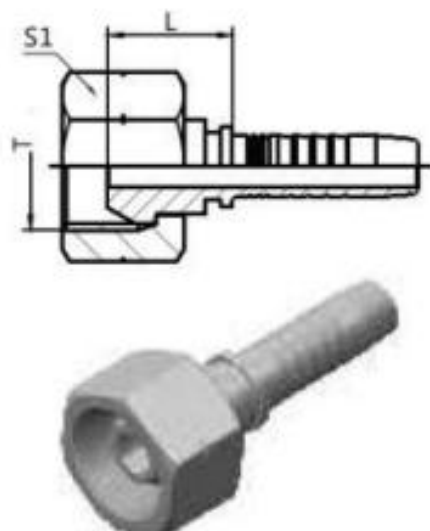

英管内螺纹60°外锥面
BSP Female 60° Cone ISO 12151-6

代号 PART NO.	螺纹T	软管 HOSE BORE		尺寸 DIMENSIONS			
	THREAD T	公称内径DN	标号 DASH	L			S1
Y22611-02-04	G1/8 " X28	6	04	16			14
Y22611-04-04	G1/4 " X19	6	04	19			19
Y22611-04-05	G1/4 " X19	8	05	19			19
Y22611-04-06	G1/4 " X19	10	06	19			19
Y22611-06-04T	G3/8 " X19	6	04	18			22
Y22611-06-05T	G3/8 " X19	8	05	19			22
Y22611-06-06	G3/8 " X19	10	06	19.5			22
Y22611-06-08	G3/8 " X19	13	08	20			22
Y22611-08-06T	G1/2 " X14	10	06	20.5			27
Y22611-08-08	G1/2 " X14	13	08	21.5			27
Y22611-10-08T	G5/8 " X14	13	08	22.5			30
Y22611-10-10	G5/8 " X14	16	10	23			30
Y22611-12-10T	G3/4 " X14	16	10	23			32
Y22611-12-12	G3/4 " X14	19	12	24			32
Y22611-16-12T	G1 " X11	19	12	24			41
Y22611-16-16	G1 " X11	25	16	26			41
Y22611-20-16T	G1.1/4 " X11	25	16	27.5			50
Y22611-20-20	G1.1/4 " X11	32	20	30.5			50
Y22611-24-20T	G1.1/2 " X11	32	20	32			55
Y22611-24-24	G1.1/2 " X11	38	24	31.5			55
Y22611-32-24T	G2 " X11	38	24	33.5			70
Y22611-32-32	G2 " X11	51	32	34			70

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为Y22612-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is Y22612-XX-XX.